

## Balastos para lámparas fluorescentes PL tipo reactor abi

Potencia LAMPARA (W)	FABRICANTE	CODIGO FABRICANTE	TENSION DE LAMPARA (V)	I LAMP (A) Op.	TENSION DE LINEA (V)	DIMENSIONES (mm)					PESO (kg)	CODIGO ORDEN DE COMPRA
						A	B	C	D	E		
7	PHILIPS	PL-7	60	0,12	120	40	33	49	25	13	0,140	BAL-00132
9	PHILIPS	PL-9	60	0,17	120	40	33	49	25	13	0,140	BAL-00164
13	PHILIPS	PL-13	60	0,30	120	40	33	49	25	13	0,140	BAL-0166
13	PHILIPS	PL-13	60	0,30	277	66	55	71	39	22	0,660	BAL-00093
18	OSRAM	DULUX 18	115	0,30	220	48	40	56	50	25	0,360	BAL-00123
26	OSRAM	DULUX 26	115	0,30	220	57	48	64	50	19	0,455	BAL-00098

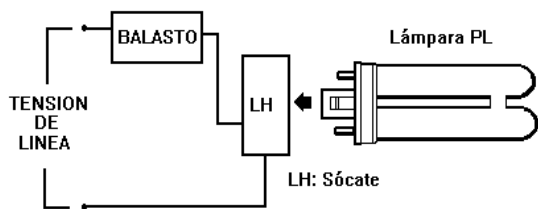


Fig. 1 Diagrama esquemático de conexión

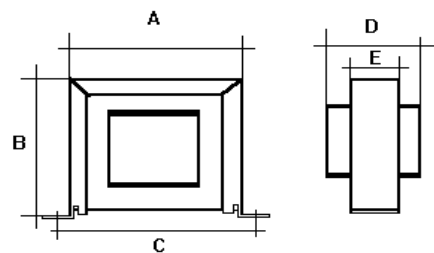


Fig 2 Dimensiones físicas